

CSS-1180-113

Product type	Capacitive proximity switches
Rated operating distance sn	8 mm
Mounting	Non-embeddable
Supply voltage range UB	10 ... 35 VDC
Permissible ripple content	≤ 10 % UB
Output current	≤ 2 x 250 mA
No-load supply current	± 15 mA typ.
LED	Yellow
Ambient temperature range TA	-25 ... +70 °C
Ambient temperature range TA US	-13 ... 158 °F
Short-circuit protection	built-in
Polarity reversal protection	Built-in
Degree of protection	IP 67
Housing material	Nickel-plated brass
Connection 1)	Connector S12
Connection	Connector S12
Setting range	0.5 ... 15 mm
Min. load current	-




More information
Doc PDF

Details

Image



Drawing

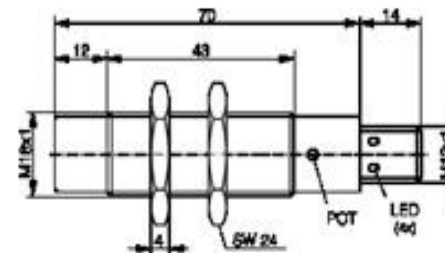

Options



Travessa da Prelada, n.º 106 | 4250-379 Porto
GPS N41.169040 W8.630748
Tel: 228 305 348/422 | Tlm: 964 096 068 | Fax: 228305425
www.sertex.pt | geral@sertex.pt