LHS-1180-303

Product type	**Photoelectric proximity switches**
Operating principle	**Diffuse (backgr. supp.)**
Emitter	**LED red 660 nm**
Standard target	**100 x 100 mm white**
Supply voltage range UB	**10 ... 36 VDC**
Permissible ripple content	**≤ 20 % UB**
Output current	**≤ 200 mA**
Voltage drop	**≤ 2 V**
No-load supply current	**≤ 25 mA**
Switching frequency	**≤ 500 Hz**
Ambient temperature range TA	**-25 ... +55 °C**
Ambient temperature range TA US	**-13 ... +131 °F**
Short-circuit protection	**built-in**
Polarity reversal protection	**Built-in**
Power on reset	**Built-in**
Degree of protection	**IP 67**
Housing material	**Chrome-plated brass**
Window material	**Glass**
Connection	**Connector S12**
Setting range	**10 ... 120 mm**

More information
Doc PDF

Details

Image

Drawing

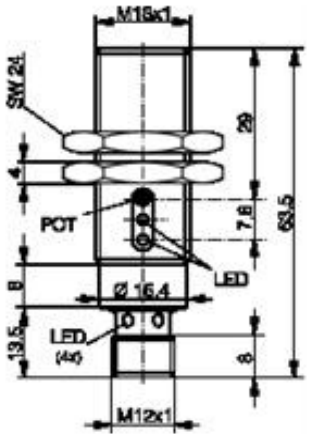

SERTEQUI
Equipamentos e Soluções desde 1997
Travessa da Prelada, n.º 106 | 4250-379 Porto
GPS N41.169040 W8.630748
Tel: 228 305 348/422 | Tlm: 964 096 068 | Fax: 228305425
www.sertequi.pt | geral@sertequi.pt