

LLS-1121L-204

Product type	Photoelectric proximity switches
Operating principle	Through-beam
Rated operating distance sn	50000 mm
Emitter	Laser red pulsed 660 nm
Standard target	-
Supply voltage range UB	10 ... 36 VDC
Permissible ripple content	≤ 20 % UB
Output current	≤ 200 mA
Ambient temperature range TA	-10 ... +50 °C
Ambient temperature range TA US	+14 ... +122 °F
Short-circuit protection	built-in
Polarity reversal protection	Built-in
Power on reset	Built-in
Degree of protection	IP 67
Housing material	Stainless-steel V2A
Window material	Glass
Connection	Connector S12




More information
Doc PDF

Details

Image



Drawing

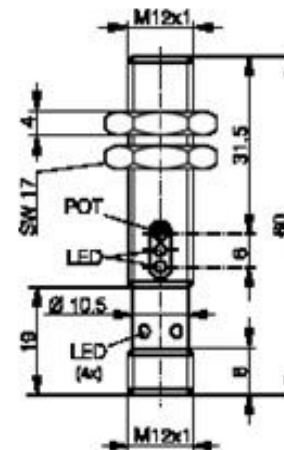

Travessa da Prelada, n.º 106 | 4250-379 Porto
GPS N41.169040 W8.630748
Tel: 228 305 348/422 | Tlm: 964 096 068 | Fax: 228305425
www.sertequi.pt | geral@sertequi.pt