

LTS-1120-303

| | |
|------------------------------|---|
| Product type | Photoelectric proximity switches |
| Operating principle | Diffuse |
| Rated operating distance sn | 300 mm |
| Emitter | LED red 660 nm |
| Standard target | 100 x 100 mm white |
| Supply voltage range UB | 10 ... 36 VDC |
| Permissible ripple content | ≤ 20 % UB |
| Output current | ≤ 200 mA |
| No-load supply current | ± 0 mA |
| Ambient temperature range TA | -25 ... +55 °C |
| Ambient temperature range TA | -13 ... +131 °F |
| US | |
| Short-circuit protection | built-in |
| Polarity reversal protection | Built-in |
| Power on reset | Built-in |
| Degree of protection | IP 67 |
| Housing material | Chrome-plated brass |
| Window material | Glass |
| Connection | Connector S12 |
| Setting range | 70 ... 300 mm |




More information
Doc PDF

Details

Image



Drawing

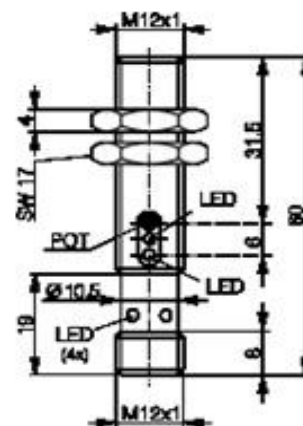

Travessa da Prelada, n.º 106 | 4250-379 Porto

GPS N41.169040 W8.630748

Tel: 228 305 348/422 | Tlm: 964 096 068 | Fax: 228305425

www.sertequi.pt | geral@sertequi.pt