UTS-1181-329

Product type	**Ultrasonic proximity switch**
Sensing range sd	**150 ... 1000 mm**
Hysteresis	**10 mm**
Repeat Accuracy	**+/- 2 mm**
Rated Ultrasonic Frequency	**200 kHz**
Standard target	**20 x 20 mm**
Supply voltage range UB	**12 ... 30 VDC (12 ... 20 V, approx. 20% reduced sensing range)**
No-load supply current	**≤ 50 mA**
Ambient temperature range TA	**-25 ... +70 °C**
Degree of protection	**IP 67**
Housing material	**Nickel-plated brass**
Transducer Enclosure Material	**PBTP (Crastin)**
Setting range	**170 ... 1000 mm**

More information
Doc PDF

Details

Image

Drawing

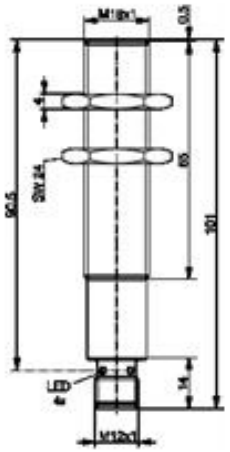

SERTEQUI
Equipamentos e Soluções desde 1997
Travessa da Prelada, n.º 106 | 4250-379 Porto
GPS N41.169040 W8.630748
Tel: 228 305 348/422 | Tlm: 964 096 068 | Fax: 228305425
www.sertequi.pt | geral@sertequi.pt